



**NORWOOD**  
Sales Inc.


# ***Kwik-Koulter***

## ***HIGH SPEED DISC HARROW***

**Front Folding Frame**

**5 HP - 15 HP  
per foot**

**24' - 60'**

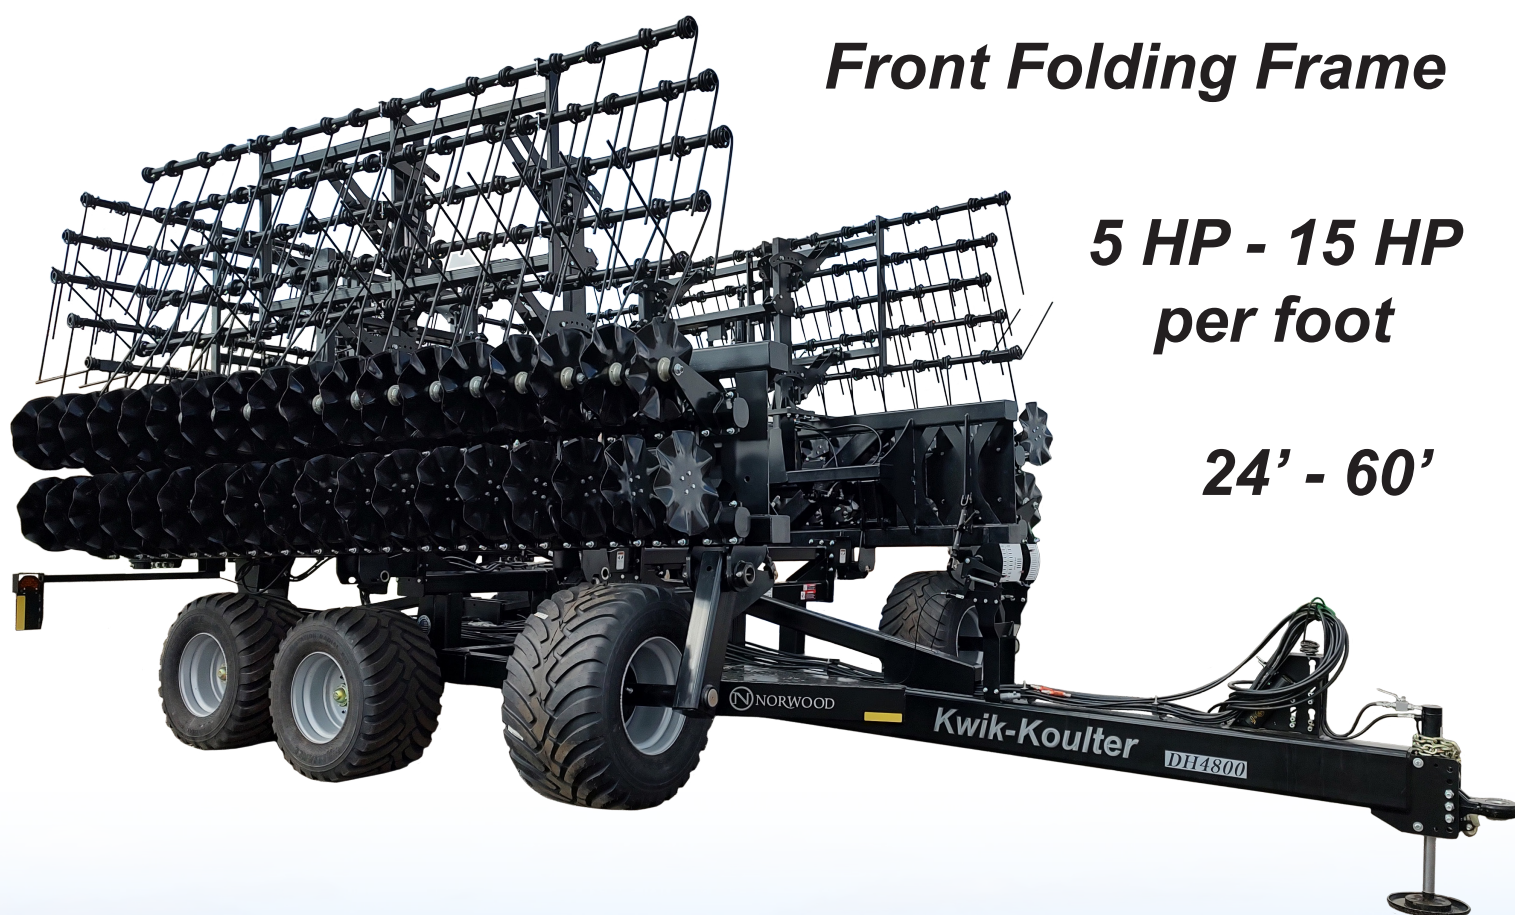

***Residue Management System***



## HYDRAULIC JACK



Provides quick, easy disconnection from tractor. Lifts vertically without moving machine backward and forward. Designed with less moving parts for a simpler more reliable operation.

## TORSION CORDS



Four rubber elements provide a pretension, allowing the discs to follow the contour of the land. Skating over obstructions and springing back to operating position. Each shank is independent, allowing for ideal flow of residue.

## ADJUSTABLE GANG FRAMES



- Independently adjustable gang frames allow the coulters to be raised and only harrows used.
- Coulters have a 6" max depth controlled by phasing cylinders on adjustable gang frames.

## HIGH FLOTATION TIRES



Unsurpassed flotation that has a large contact area. Makes for excellent weight distribution for reduced ground-bearing pressure and less soil compaction.

## COULTER DISKS



- 20" - 8 Wave Coulters provide maximum cutting and mixing effectiveness of any residue.
- 6° Angle, 0° Pitch disk position
- 12" Staggered spacing, 6" overall

## HARROW TINES



- 5-Bar Harrows with 5/8" x 30" abrasion resistant tip spring tines.
- Tine angle is adjustable from 90° to 45°
- Down pressure springs for soil penetration and reduction in bounce.

## SINGLE POINT DEPTH CONTROL



- Single point depth control allows for quick and easy adjustment of depth.
- Easy to read tool position indicators.

## OPTIONS

### Wing Weights

Can be added for extra soil penetration in harden soil conditions.

### Tow Kit

Mounted to the main frame, can be extended and used to tow vehicles.



Model	Transport				Unfolded		Weight (lbs)	Tire Size	# of Discs
	Height	Length	Width	Tongue Weight	Length	Width			
DH2400	12' - 9"	18' - 6"	14' - 3"	1,600	28' - 6"	24' - 0"	20,000	600/50-22.5	48
DH3600	12' - 9"	22' - 7"	18' - 3"	3,300	32' - 7"	36' - 0"	24,000	600/50-22.5	72
DH4800	12' - 9"	28' - 4"	18' - 3"	4,700	48' - 0"	38' - 4"	31,000	600/50-22.5	96
DH6000	12' - 9"	32' - 9"	18' - 3"	10,000	60' - 0"	42' - 9"	47,000	600/50-22.5	120

\* All specifications are subject to change without notification



11202 38th St. South  
Horace, ND 58047

Local: 1 (701) 588-4000  
Toll Free: 1 (800) 446-0316  
www.norwoodsales.com