




NORWOOD
Sales Inc.



Kwik-Koultter

HIGH SPEED DISC HARROW

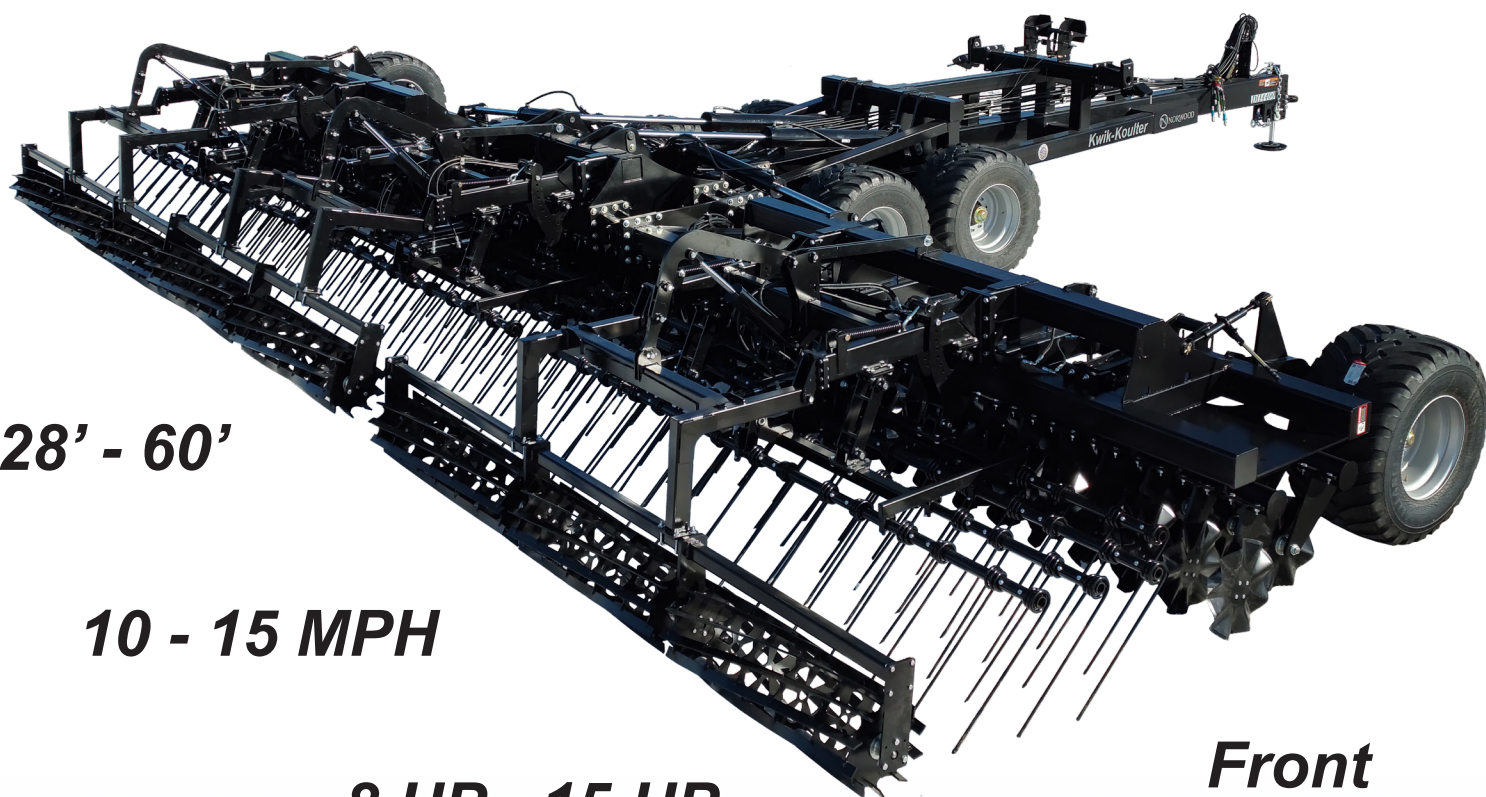

28' - 60'

10 - 15 MPH

**8 HP - 15 HP
per foot**

**Front
Folding Frame**



Residue Management System

HYDRAULIC JACK



Provides quick, easy disconnection from tractor. Lifts vertically without moving machine backward and forward. Designed with less moving parts for a simpler more reliable operation.

TORSION CORDS



Four rubber elements provide a pretension, allowing the disks to follow the contour of the land. Skating over obstructions and springing back to operating position. Each shank is independent, allowing for ideal flow of residue.

ADJUSTABLE GANG FRAMES



- Phased gang frames allow the coulters to be raised and only harrows used.
- Coulters have a 6" max depth controlled by phasing cylinders on adjustable gang frames.

HIGH FLOTATION TIRES



Unsurpassed flotation that has a large foot print. Makes for excellent weight distribution for reduced ground-bearing pressure and less soil compaction.

HARROW TINES



- 4-Bar Harrows with 5/8" x 30" abrasion resistant tip spring tines.
- Tine angle is adjustable from 90° to 45°
- Down pressure springs for soil penetration and reduction in bounce.

COULTER DISKS



- 20" - 8 Wave Coulters provide maximum cutting and mixing effectiveness of any residue.
- 6° Angle, 0° Pitch disk position
- 12" Staggered spacing, 6" overall

FINISHING BASKETS



OPTIONAL

- Single and Dual basket configurations.
- Rod, Flat Bar, and Coil baskets

TINE LOCKS

Can be added to stop harrow tine to disc wedging during tight turns on wing ends.


OPTIONAL

WING WEIGHTS

Can be added for extra soil penetration in hardened soil conditions.

OPTIONAL

SINGLE POINT DEPTH CONTROL

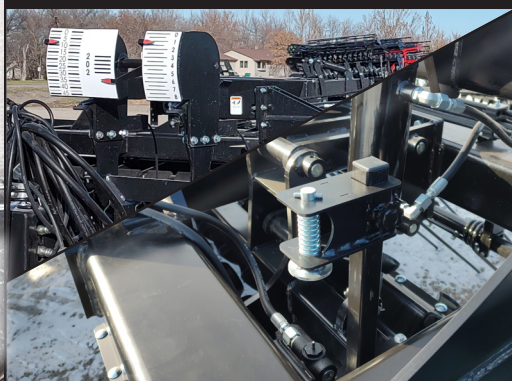

- Single point depth control allows for quick and easy adjustment of depth.
- Easy to read tool position indicators.

| Model | Transport | | | | Unfolded | | Weight (lbs)** | Tire Size | # of Discs |
|--------|-----------|----------|----------|---------------|-----------|----------|----------------|-----------------|------------|
| | Height | Length | Width* | Tongue Weight | Length | Width | | | |
| DH2800 | 13' - 3" | 21' - 3" | 14' - 0" | 2,600 | 28' - 6" | 28' - 0" | 23,400 | (2) 600/50-22.5 | 56 |
| DH3600 | 13' - 3" | 26' - 4" | 14' - 0" | 3,300 | 39' - 9" | 36' - 0" | 25,750 | (2) 710/40-22.5 | 72 |
| DH4400 | 13' - 3" | 30' - 0" | 14' - 0" | 4,200 | 39' - 3" | 44' - 0" | 35,200 | (4) 600/50-22.5 | 88 |
| DH5200 | 13' - 3" | 34' - 9" | 14' - 0" | 6,500 | 44' - 10" | 52' - 0" | 40,400 | (4) 710/40-22.5 | 104 |
| DH6000 | 13' - 3" | 32' - 9" | 14' - 0" | 10,000 | 42' - 9" | 60' - 0" | 47,500 | (4) 710/40-22.5 | 120 |

*Add 3'-7" to transport width with dual baskets

**Does not include basket option

***All specifications are subject to change without notification



11202 38th St. South
Horace, ND 58047

Local: 1 (701) 588-4000
Toll Free: 1 (800) 446-0316
www.norwoodsales.com

