


### THE FUTURE OF SEED TENDERS IS HERE!

The all **NEW SEED SHUTTLE 290, 400 & 500** are the first all non-corrosive poly tank Seed Tenders on the market today. Their unique features such as both side and rear discharge unloading positions, and a heavy duty frame designed for tough commercial and farm use. In addition to easy see handling, you are able to use your **SEED SHUTTLE 290, 400 & 500** as a water tank as well...making them the most versatile tender on the market.

The **Seed Shuttle** brand of seed tenders is the only tender on the market with non-corrosive poly tanks. Seed Shuttle comes in three different sizes and three different configurations. Customers can choose any configuration between, just the tender to be put on your trailer, see tender on our trailer with bumper hitch, to the seed tender on our trailer with a gooseneck hitch.

The sizes are measured in units with three different models available. The smallest unit is the *Seed Shuttle 290* rated at 290 units, Next is the all new *Seed Shuttle 400* rated at 400 units, And the largest is the *Seed Shuttle 500* rated at 500 units.

### SEED SHUTTLE

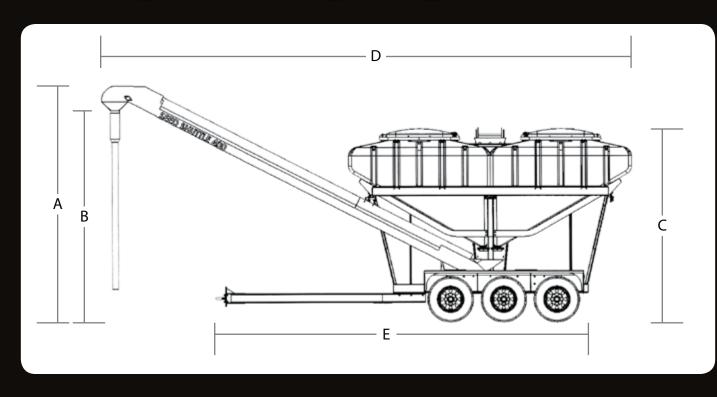

#### SEED SHUTTLE 400

A. 13'- 4<sup>1</sup>/<sub>2</sub>" | B. 11'- 8"

D. 29'- 11½" E. 23'- 4"

C. 10'- 11<sup>1</sup>/<sub>4</sub>"

#### SEED SHUTTLE 290

A. 13'- 4" B. 11'- 8"

B. 11'- 8" E. 17'- 2" C. 10'- 6"

#### SEED SHUTTLE 500

A. 13'- 4<sup>1</sup>/<sub>2</sub>" |

D. 30'- 1" E. 22'- 11"

D. 33'- 6"

B. 11'- 8" E. 2

C. 12'- 4"



800-446-0316 www.norwoodsales.com

# SEED SHUTTLE



Manufactured by:





## SEED SHUTTLE 290

## SEED SHUTTLE400

## SEED SHUTTLE JULI





- 182 Degree conveyor swivel with both side and rear unloading positions
- 2 145 Unit poly tanks with independent slide controls
- 2 45" X 27" sealed lid openings
- Wireless remote with infinite belt speed control
- 8" Diameter tube 24' long conveyor for extra reach for center-fill planters
- 10" Wide all rubber belt, 1,800 lbs. per minute
- Enclosed belt on return of conveyor
- 17 Locking positions on the conveyor
- Transport lock on the conveyor for safety
- 3 Piece telescoping downspout
- 5.5 Honda motor, with electric start and centrifugal clutch
- 18" Wide catwalk with side ladder access
- Powder Coated Frame
- Heavy Duty Frame (4500 lb approximate weight)

#### **OPTIONS**

- Trailer with 2-7000 lb torsion axles and adjustable hitch
- Weigh scales
- Kit to convert to water tanks Inoculator kit





ss 400 & 500 FEATURES:

- 180° Conveyor swivel with both side and rear unloading positions
- (2) 200 Unit poly tank (SS400) with independent slide controls
- (2) 250 Unit poly tank (SS500) with independent slide controls
- (2) 40" Square sealed lid openings
- Wireless remote with infinite belt speed control
- 8" Diameter, 24' long tube conveyor for extra reach for center-fill planters

- 10" Wide all rubber belt, 1,800 lbs per minute
- Enclosed belt on return side of the conveyor
- 15 Conveyor locking positions
- Transport support lock on conveyor for safety
- (3) Piece telescoping downspout
- 5.5 Hp Honda motor with electric start and centrifugal clutch
- 18" Wide catwalk with ladder access from the side
- Durable powder coat finish
- Heavy Duty all steel frame



OPTIONS

Pintle Hitch trailer with (3) 10,000 lb Heavy Duty Torsion axles Gooseneck trailer with (3) 10,000 lb Heavy Duty Torsion axles 9 8" 20' Conveyor (Lower Height Clearance)

#### OPTIONS

- Gooseneck trailer with (3) 7,000 lb Heavy Duty Torsion axles
- Pintle Hitch trailer with (3) 7,000 lb Heavy Duty Torsion axles
- Weigh Scale Kit
- Liquid Conversion Kit
- Inoculator Kit

304 Stainless Steel Conveyor











































































