

# Kwik-Kover



POWERED BY  
**MonTag**


The team at Norwood Sales, Inc. is pleased to announce the launch of an additional optional feature to our Kwik-Till High Speed Disc. In cooperation with MonTag Manufacturing, we are now offering a dry fertilizer, nutrient and cover crop applicator for all 2023 bi-fold and tri-fold units (HSD1600 to HSD4500). We are also offering a dealer installed kit on our 2019 to 2022 units of the same size.

## STAINLESS STEEL HOPPER



Built for excellent corrosion resistance, for use on dry fertilizer, nutrients or cover crops. Stainless steel components are found throughout the Kwik-Kover.

## HDPE AUGER METERS

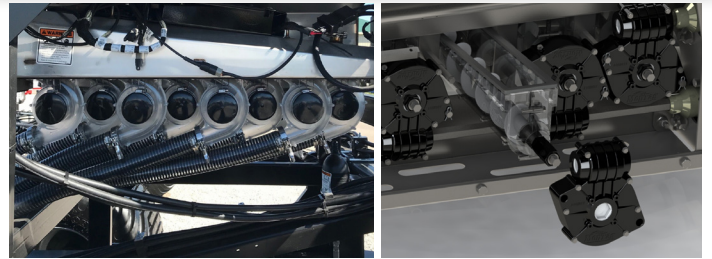

Eight individual High Density Polyethylene auger meters ensure proper metering of the commodity to the main hoses. Hoses can be split to achieve the desired distribution width from the deflectors.



 **NORWOOD**  
Sales Inc.

**HIGH SPEED**  
**DRY COMMODITY APPLICATOR**

## ADJUSTABLE COMMODITY DEFLECTOR



Easily adjustable 10-position stainless steel commodity deflectors ensure a proper distribution pattern and long wear life.

## PWM METERING CONTROL



Pulse Width Modulation allows for control of the product metering system and the fan with only one hydraulic SCV required. The block includes safety valves to protect the fan seals and reduces heat in the hydraulic system.

## CRARY FAN & DWYER AIR GAUGE



Industry standard for quality, high performance with low hydraulic requirements. Accurate fan pressure gauge is hard mounted.

## ISOBUS SCALE SYSTEM



The 2108 comes "Scale Ready" for either a digital or ISOBUS solution.

## MULTIPLE CONTROLLER OPTIONS



Compatible with basic rate controllers or can be operated with ISO rate controllers, such as the MonTag ISO controller.

## SPECIFICATIONS

Bin Size: **55 bu/68.2 ft<sup>3</sup>**  
Empty Weight: **2,300-2,400 lbs**  
Full Weight (60 lb/bu): **5,600-5,700 lbs**  
Rate Capacity (bin/total): **25-500 lb/ac**  
SCV Requirement: **1 SCV**  
Req. Hydraulic Capacity: **14-18 gpm**  
Req. Hydraulic Press: **2000 psi**  
Row Configurable: **8 Rows**  
Product Fill Inlet Size: **20"**  
Outlet Hose Size: **2.00"**  
Unit Height: **11'4"**  
Service Slide Gate Control: **Manual Lever**

Dealer:



11202 38th St. South  
Horace, ND 58047

Local: 1 (701) 588-4000  
Toll Free: 1 (800) 446-0316  
[www.norwoodsales.com](http://www.norwoodsales.com)

